

Key Parameters

V_{RRM}	= 1800V
$I_{F(AV)}$	= 400A
I_{FSM}	= 8500A
$V_{F(TO)}$	= 0.80V
r_F	= 0.68mΩ

Features

- Full blocking capability over wide temperature range
- Pressure contacts technology for high reliability

Applications

- Power Supplies
- Uncontrolled Rectifiers
- Welding
- Induction Heating / Melting
- Battery Chargers

Ordering Information


MS D	404	N	XX	M	K
Rectifier Diode	Current code	Polarity R= Stud Anode N= Stud Cathode	Voltage Code Code X 100 = V_{RRM}	Stud Threads M = Stud M24 X 1.5 M1 = Stud M20 X 1.5 U = 3/4" 16UNF-2A	Technology K = Pressure Contact Technology
Order Code MS D404N18MK : 1800V V_{RRM} , Metric Stud, Diode with stud Cathode					

Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 2

Symbol	Characteristic	Conditions	T _j [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		170	200 - 1800	V
V _{RSM}	Non-repetitive peak reverse voltage		170	300 - 1900	V
I _{RRM}	Repetitive peak reverse current	V = V _{RRM}	170	50	mA
CONDUCTING					
I _{F(AV)}	Mean forward current	180° sin ,50 Hz, T _c =120°C		400	A
I _{FRMS}	RMS current	T _c =120°C		628	A
I _{FSM}	Surge forward current	Sine wave, 10 ms Without reverse voltage	25	8500	A
			170	7500	A
I ² t	I ² t	Sine wave, 10 ms Without reverse voltage	25	361 x 10 ³	A ² s
			170	281 x 10 ³	A ² s
V _F	Forward voltage	On-state current = 1260A	170	1.68	V
V _{F(TO)}	Threshold voltage		170	0.80	V
r _F	Forward slope resistance		170	0.68	mΩ
MOUNTING					
R _{th(j-c)}	Thermal impedance, sin 180°	Junction to case		0.086	°C/W
R _{th(c-h)}	Thermal impedance	Case to heatsink		0.02	°C/W
T _j	Max. junction temperature			170	°C
T _{stg}	Storage temperature			-40 170	°C
M	Mounting torque			2.7 - 3.0	Kgm
W	Weight (Approx.)			500	gm
			Prepared by : ABA	Date of Publication : 25.03.2015	
			Approved by : RBS	Revision : 2	


DISSIPATION CHARACTERISTICS

SINE WAVE

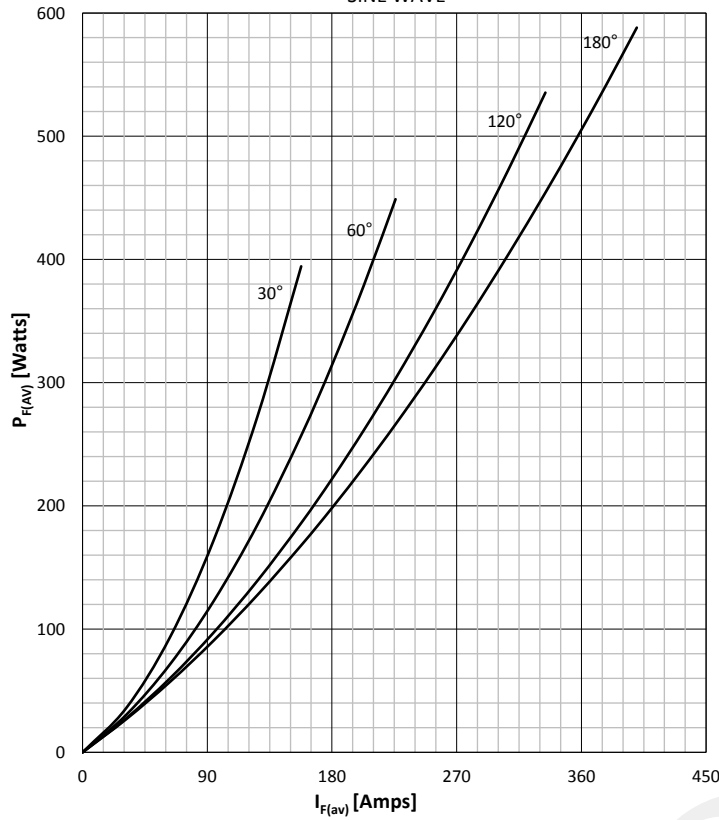


FORWARD CURRENT DERATING CURVE

SINE WAVE

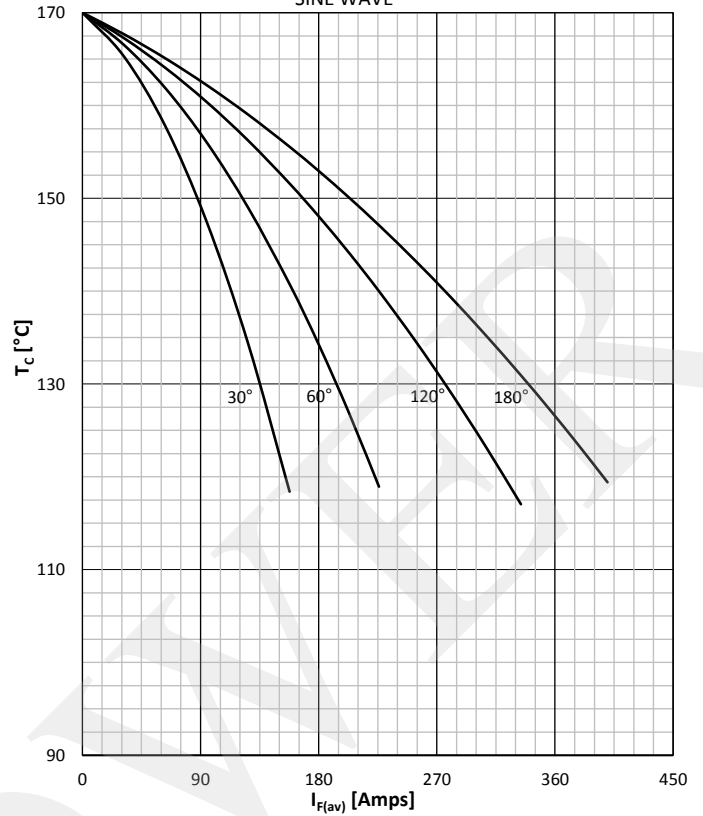


DISSIPATION CHARACTERISTICS

SQUARE WAVE

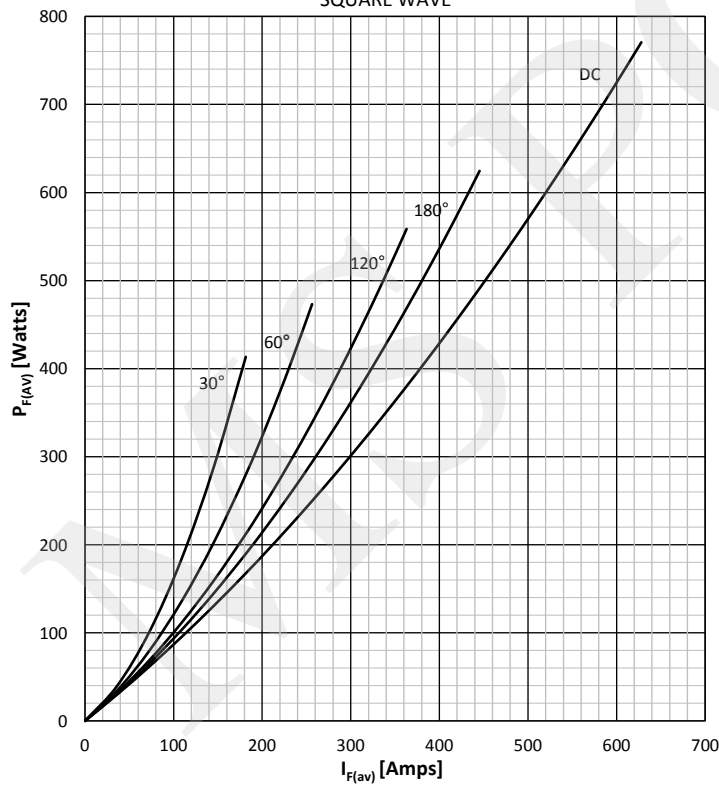

FORWARD CURRENT DERATING CURVE

SQUARE WAVE

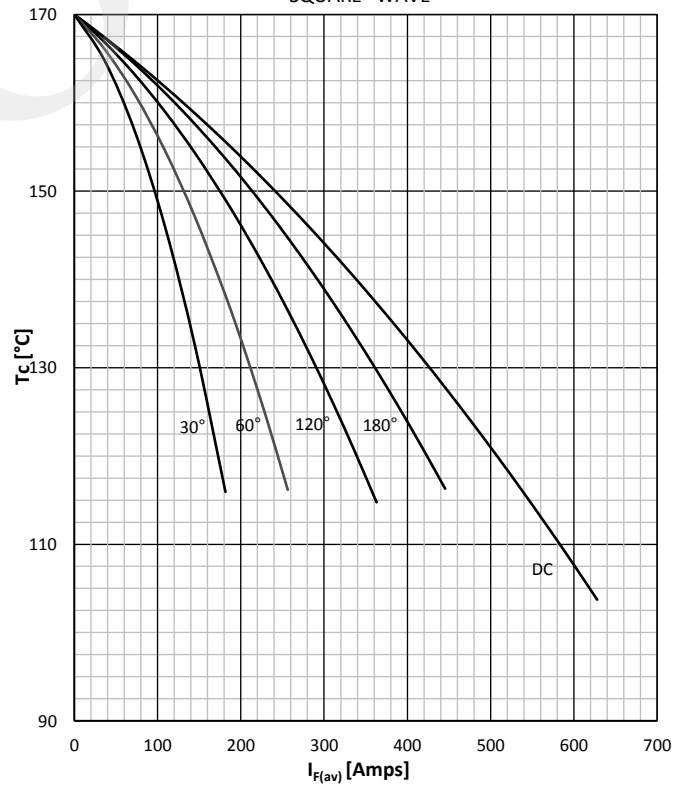


Prepared by : ABA

Date of Publication : 25.03.2015


Approved by : RBS

Revision : 2


FORWARD CHARACTERISTIC

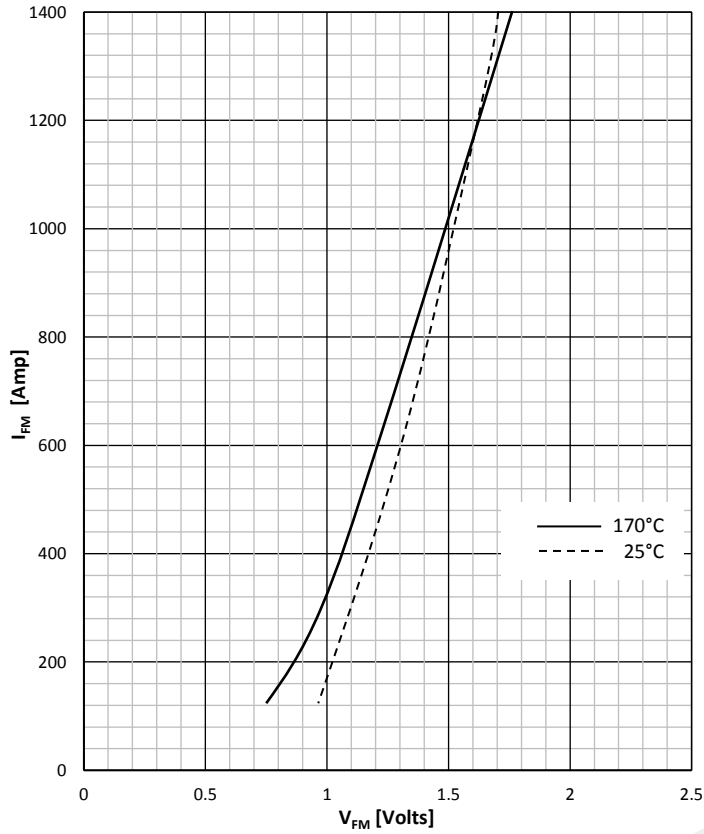

SURGE CHARACTERISTICS

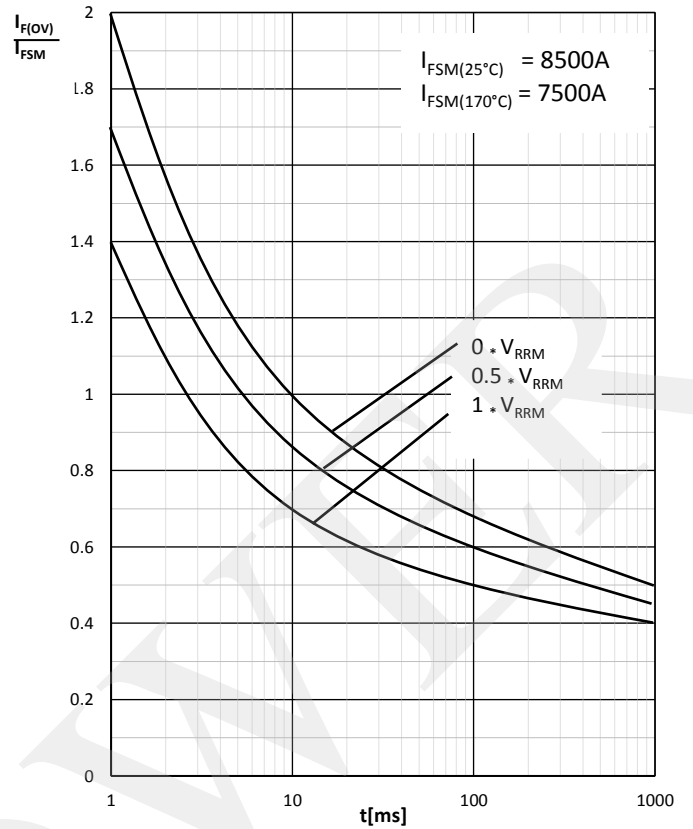


TRANSIENT THERMAL IMPEDANCE

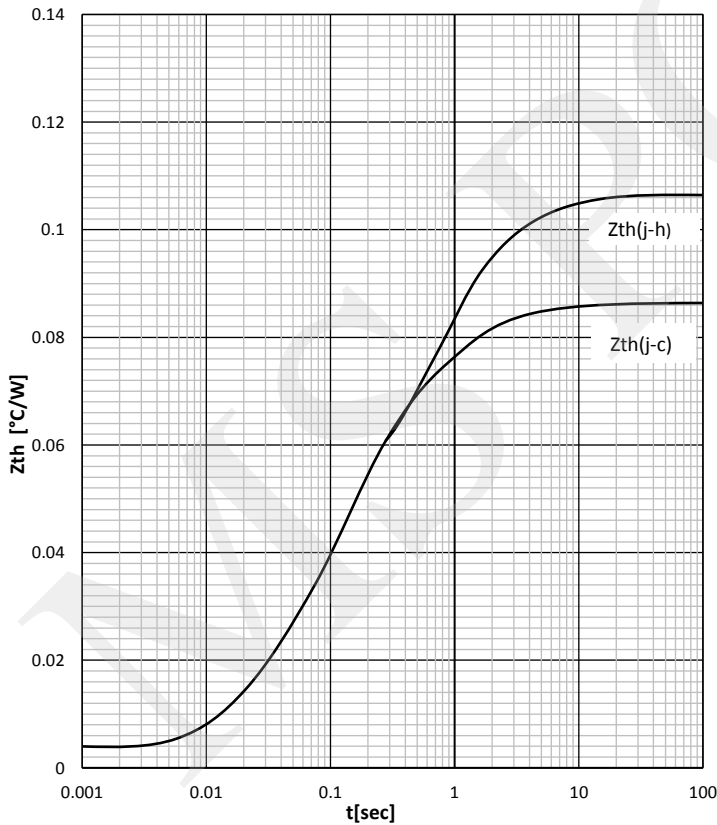

Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 2

Outline

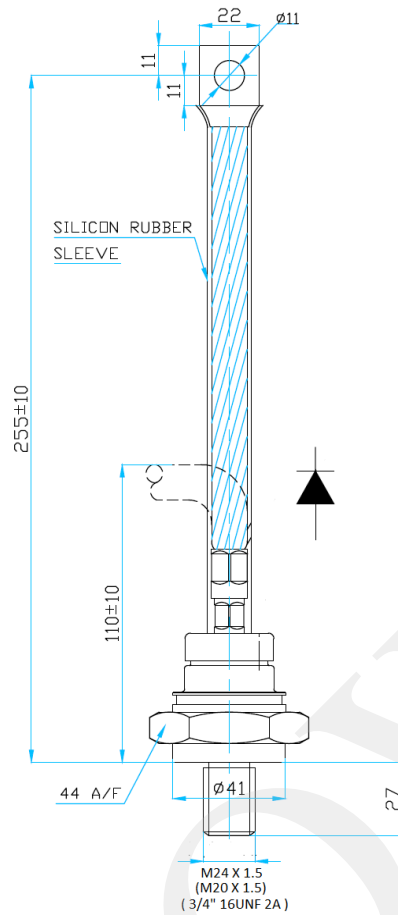

MS Power GmbH

Mergenthalerallee 79-81
65760 Eschborn, Germany
Web: www.mspowergroup.com
Mail: info@mspowergroup.de

Sales & Enquiry:

sales@mspowergroup.de

Technical Support:

solution@mspowergroup.de

After sales Service:

service@mspowergroup.de

Phone: +49 (0) 6196/7768 666

Fax: +49 (0) 6196/7757 888



Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 2

Terms & Conditions of usage :

The data contained in this product datasheet is exclusively Intended for technically trained staff. You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application. This product datasheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics. The information in the valid application-and assembly notes of the device must be considered.

Should you require product information in excess of the data given in this product datasheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see www.mspowergroup.com). For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or live endangering or life support applications, please notify. Please note, that for any such applications we urgently recommend

- to perform joint Risk and Quality Assessments;
- the conclusion of Quality Agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery depended on the realization of any such measures.

If and to the extent necessary, please forward equivalent notices to your customers.

Changes of this product datasheet are reserved.

Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 2