



Key Parameters

V_{DRM} / V_{RRM}	= 2500V
$I_{T(AV)}$	= 2825A
I_{TSM}	= 56kA
$V_{T(TO)}$	= 1.581V
r_T	= 0.171mΩ

Features

- Full blocking capability over wide temperature range
- High Surge current capability
- Hermetic metal case with ceramic insulator
- Distributed gate

Applications

- Battery Chargers
- Medical Equipment
- UPS
- Power Supplies
- Motor control
- Transportation
- Induction Heating
- Welding

Ordering Information

MS TF	2825	C	XX	F	2G
Fast Switching Thyristor	Current Code	C - Capsule package with Alloyed silicon technology	Voltage Code Code X 100 = V_{DRM}/V_{RRM}	Reapplied dv/dt F = 200V/μsec	Turn Off time code 2K = 40μsec 2J = 50μsec 2N = 60μsec 2G = 70μsec 4J = 100μsec


Order Code MS TF2825C24F2G – 2400V V_{DRM}, V_{RRM} , $T_q=70\mu\text{sec}$, 26mm clamp height capsule

Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 0

Symbol	Characteristic	Conditions	T _j [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		125	2000 - 2500	V
V _{RSM}	Non-repetitive peak reverse voltage		125	2100 - 2600	V
V _{DRM}	Repetitive peak off-state voltage		125	2000 - 2500	V
I _{RRM}	Repetitive peak reverse current	V = V _{RRM}	125	250	mA
I _{DRM}	Repetitive peak off-state current	V = V _{DRM}	125	250	mA
CONDUCTING					
I _{T(AV)}	Mean on state current	180° sin ,50 Hz, T _c =70°C, Double side cooled 180° sin ,50 Hz, T _c =64°C, Double side cooled		2825 3050	A
I _{RMS}	RMS on-state current	T _c =64°C, Double side cooled		4788	A
I _{TSM}	Surge on-state current	Sine wave, 10 ms Without reverse voltage	25	56000	A
			125	55000	A
I ² t	I ² t	Sine wave, 10 ms Without reverse voltage	25	15680 x 10 ³	A ² s
			125	15125 x 10 ³	A ² s
V _T	On-state voltage	On-state current = 5000A	125	2.45	V
V _{T(TO)}	Threshold voltage		125	1.581	V
r _T	On-state slope resistance		125	0.171	mΩ
SWITCHING					
di/dt	Critical rate of rise of on-state current	Repetitive	125	500	A/μs
dv/dt	Critical rate of rise of off-state voltage	V _{DR} = 67%V _{DRM}	125	500	V/μs
Q _{rr}	Recovered Charge	I _{TM} =1000A, -di _F /dt = 60A/μs, V _R = 50V, t _p =1000μs	125	2000	μC
T _q	Circuit commutated turn off time	I _{TM} =1000A, -di _F /dt = 20A/μs, V _R = 50V, t _p =1000μs Reapplied dv/dt = 200V/μs, V _{DR} = 33%V _{DRM}	125	40 - 100	μs
GATE					
I _{gt}	Gate trigger current	V _D =6V	25	450	mA
V _{gt}	Gate trigger voltage	V _D =6V	25	4.5	V
I _H	Holding current	V _D =6V, gate open circuit	25	1000	mA
I _L	Latching current	V _D =6V	25	1200	mA
MOUNTING					
R _{th(j-c)}	Thermal impedance, sin 180°	Junction to case, Double side cooled		0.007	°C/W
R _{th(j-c)}	Thermal impedance, rec120°	Junction to case, Double side cooled		0.008	°C/W
R _{th(c-h)}	Thermal impedance	Case to heatsink, Double side cooled		0.002	°C/W
T _j	Max. junction temperature			125	°C
T _{stg}	Storage temperature			-40 125	°C
M	Clamping Force			64 - 78	kN
W	Weight (Approx.)			1250	gm
			Prepared by : ABA	Date of Publication : 25.03.2015	
			Approved by : RBS	Revision : 0	


DISSIPATION CHARACTERISTICS

SINE WAVE

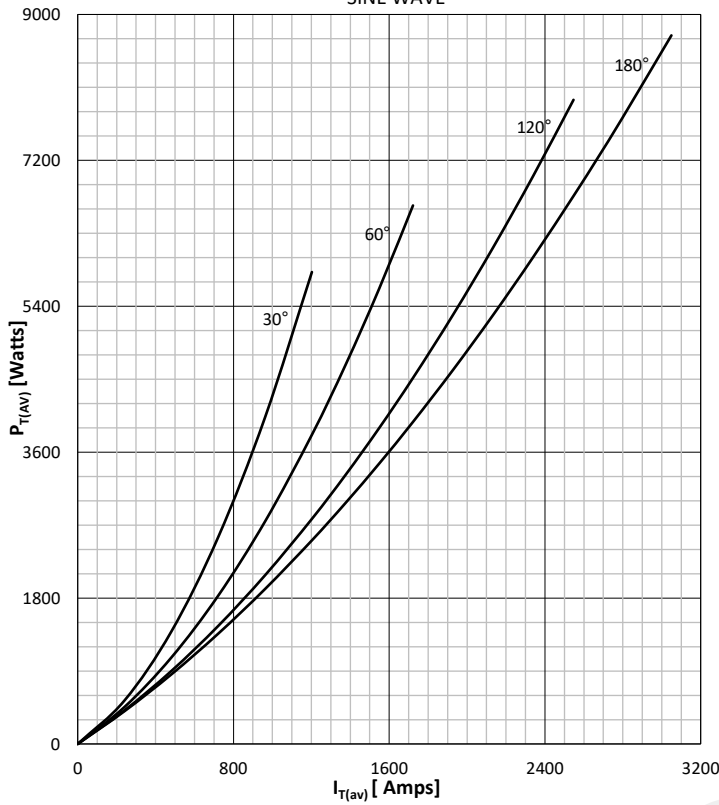


ON STATE CURRENT DERATING CURVE

SINE WAVE

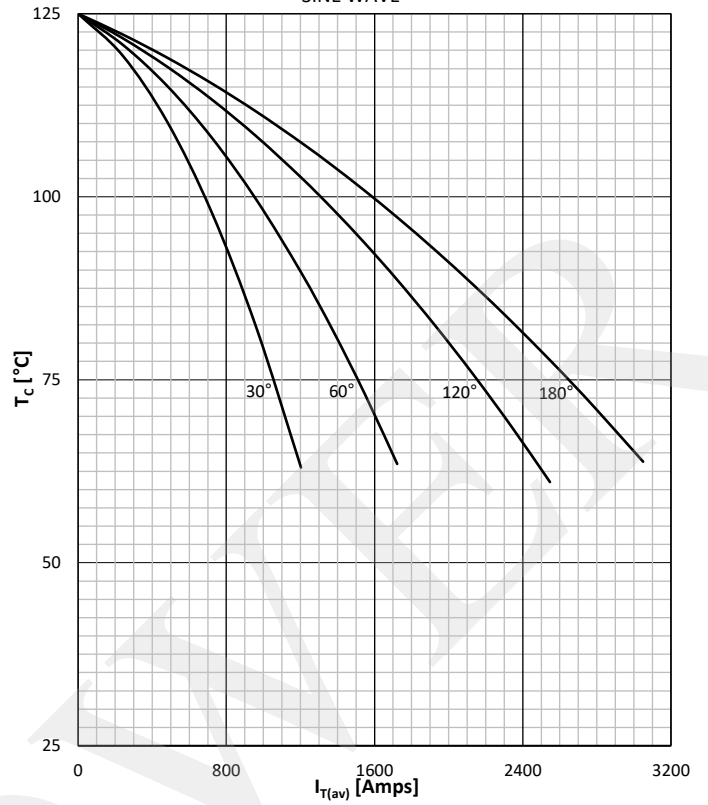


DISSIPATION CHARACTERISTICS

SQUARE WAVE

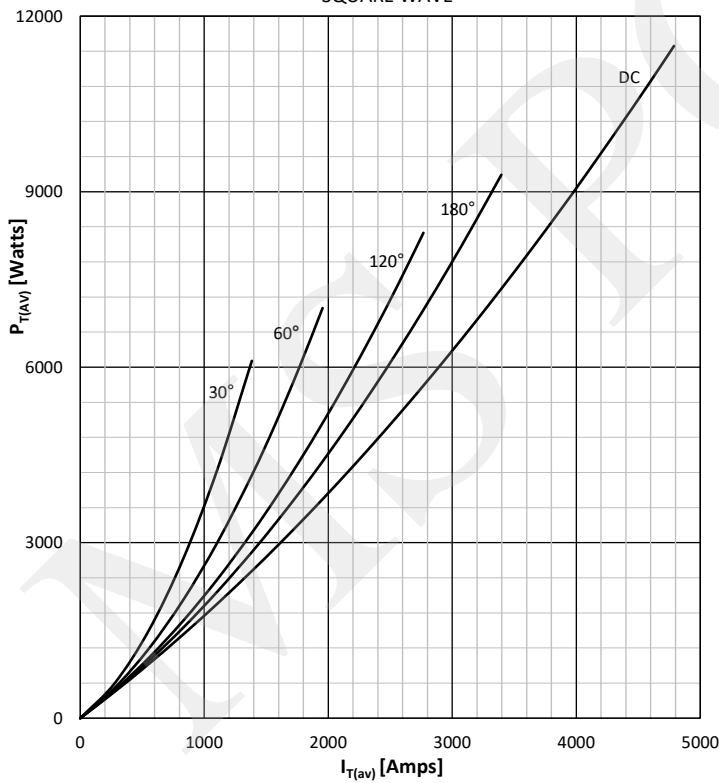

ON STATE CURRENT DERATING CURVE

SQUARE WAVE

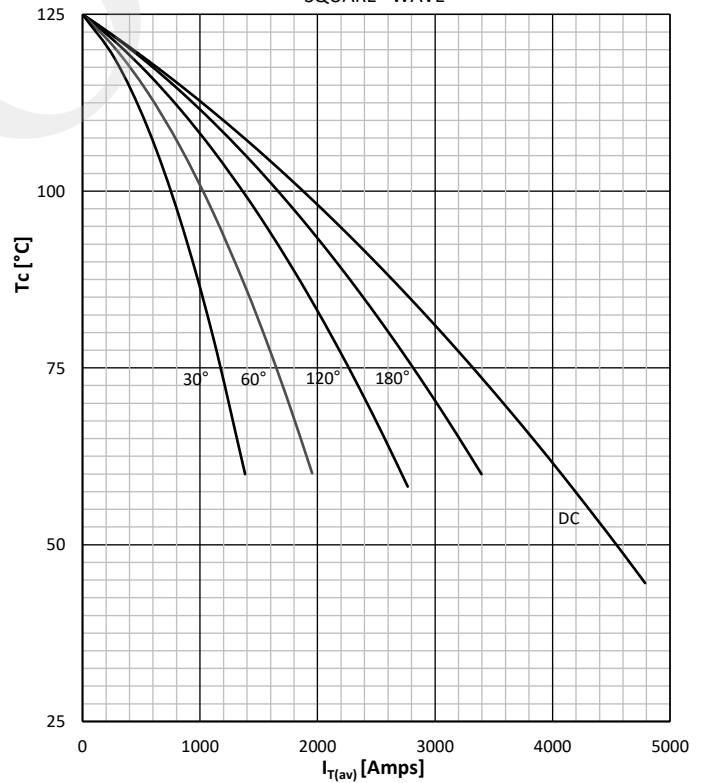


Prepared by : ABA

Date of Publication : 25.03.2015


Approved by : RBS

Revision : 0


ON -STATE CHARACTERISTIC

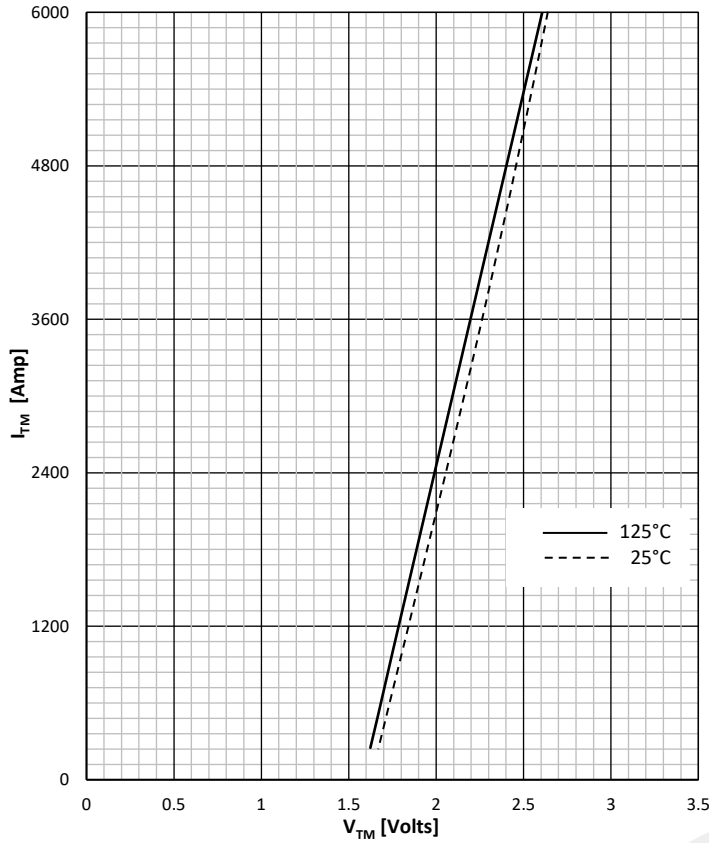


SURGE CHARACTERISTICS

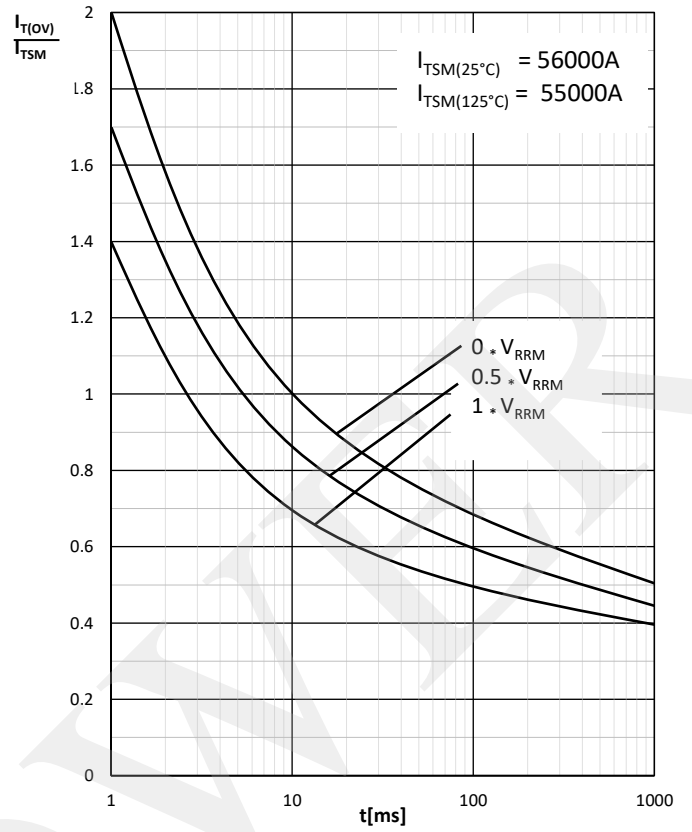

TRANSIENT THERMAL IMPEDANCE, PER ARM

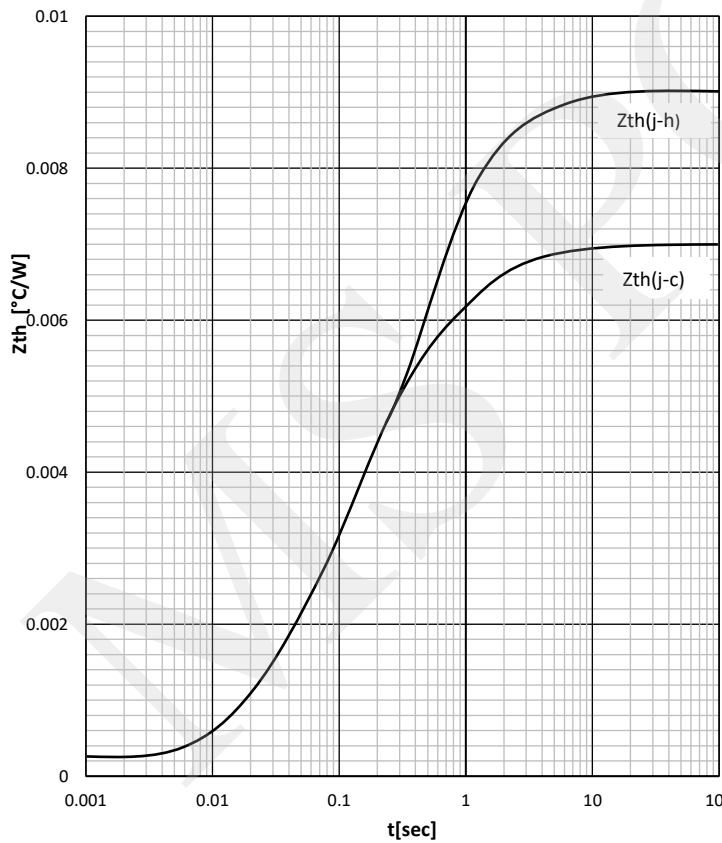

GATE TRIGGER CHARACTERISTICS

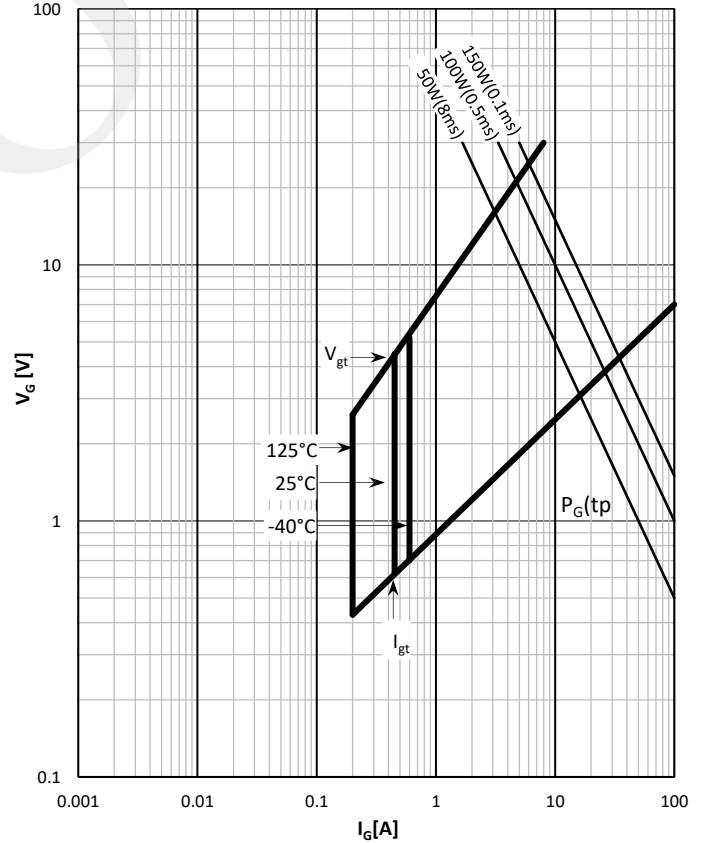


Prepared by : ABA

Date of Publication : 25.03.2015

Approved by : RBS

Revision : 0

Outline

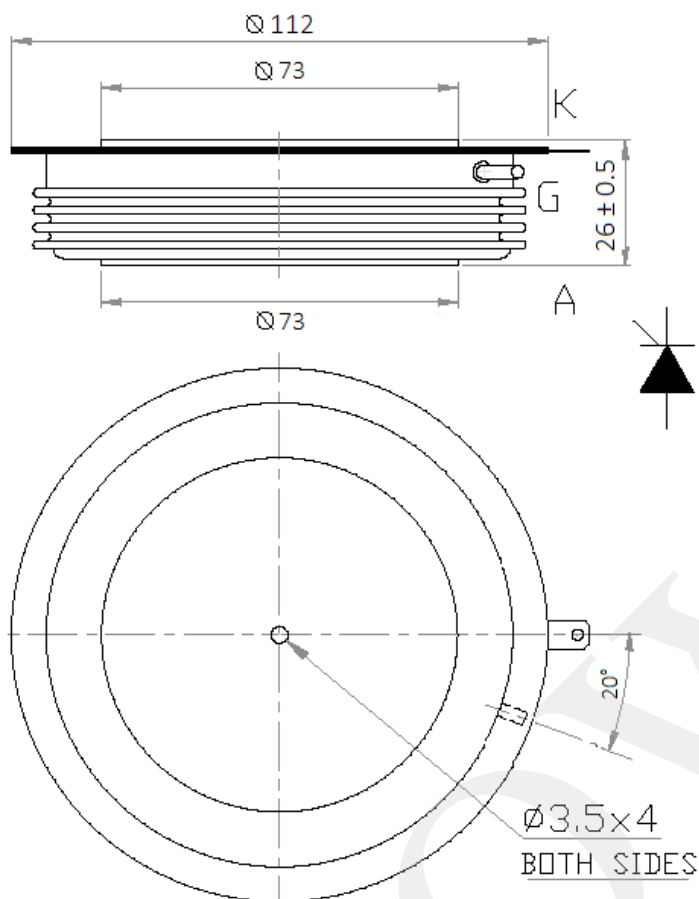

MS Power GmbH

Mergenthalerallee 79-81
65760 Eschborn, Germany
Web: www.mspowergroup.com
Mail: info@mspowergroup.de

Sales & Enquiry:

sales@mspowergroup.de

Technical Support:

solution@mspowergroup.de

After sales Service:

service@mspowergroup.de

Phone: +49 (0) 6196/7768 666

Fax: +49 (0) 6196/7757 888



Prepared by : ABA

Date of Publication : 25.03.2015

Approved by : RBS

Revision : 0

Terms & Conditions of usage :

The data contained in this product datasheet is exclusively Intended for technically trained staff. You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application. This product datasheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics. The information in the valid application-and assembly notes of the device must be considered.

Should you require product information in excess of the data given in this product datasheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see www.mspowergroup.com). For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or live endangering or life support applications, please notify. Please note, that for any such applications we urgently recommend

- to perform joint Risk and Quality Assessments;
- the conclusion of Quality Agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery depended on the realization of any such measures.

If and to the extent necessary, please forward equivalent notices to your customers.

Changes of this product datasheet are reserved.

Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 0