



**Key Parameters**

$V_{DRM} / V_{RRM}$	= 2200V
$I_{T(AV)}$	= 700A
$I_{TSM}$	= 11.5kA
$V_{T(TO)}$	= 1.20V
$r_T$	= 0.65mΩ

**Features**

- Full blocking capability over wide temperature range
- High Surge current capability
- Hermetic metal case with ceramic insulator
- Distributed gate

**Applications**

- Battery Chargers
- Medical Equipment
- UPS
- Power Supplies
- Motor control
- Transportation
- Induction Heating
- Welding

**Ordering Information**



MS TF	700	C	XX	D	N
Fast Switching Thyristor	Current Code	C - Capsule package with Alloyed silicon technology	Voltage Code Code X 100 = $V_{DRM}/V_{RRM}$	Reapplied dv/dt D = 50V/μsec	Turn Off time code N = 30μsec
Order Code MS TF700C22DN – 2200V $V_{DRM}, V_{RRM}$ , $T_q=30\mu\text{sec}$ , 26mm clamp height capsule					

Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 0

Symbol	Characteristic	Conditions	T <sub>j</sub> [°C]	Value	Unit
<b>BLOCKING</b>					
V <sub>RRM</sub>	Repetitive peak reverse voltage		125	2000 - 2200	V
V <sub>RSM</sub>	Non-repetitive peak reverse voltage		125	2100 - 2300	V
V <sub>DRM</sub>	Repetitive peak off-state voltage		125	2000 - 2200	V
I <sub>RRM</sub>	Repetitive peak reverse current	V = V <sub>RRM</sub>	125	100	mA
I <sub>DRM</sub>	Repetitive peak off-state current	V = V <sub>DRM</sub>	125	100	mA
<b>CONDUCTING</b>					
I <sub>T(AV)</sub>	Mean on state current	180° sin ,50 Hz, T <sub>c</sub> =70°C, Double side cooled 180° sin ,50 Hz, T <sub>c</sub> =80°C, Double side cooled		700 630	A
I <sub>RMS</sub>	RMS on-state current	T <sub>c</sub> =70°C, Double side cooled		1099	A
I <sub>TSM</sub>	Surge on-state current	Sine wave, 10 ms Without reverse voltage	25	11.5	kA
			125	10.0	kA
I <sup>2</sup> t	I <sup>2</sup> t	Sine wave, 10 ms Without reverse voltage	25	661 x 10 <sup>3</sup>	A <sup>2</sup> s
			125	500 x 10 <sup>3</sup>	A <sup>2</sup> s
V <sub>T</sub>	On-state voltage	On-state current = 1978A	25	2.30	V
V <sub>T(TO)</sub>	Threshold voltage		125	1.20	V
r <sub>T</sub>	On-state slope resistance		125	0.65	mΩ
<b>SWITCHING</b>					
di/dt	Critical rate of rise of on-state current	Non-Repetitive, V <sub>D</sub> =0.67V <sub>DRM</sub> , I <sub>TM</sub> = 2I <sub>T(AV)</sub> , I <sub>G</sub> =I <sub>FGM</sub> , V <sub>G</sub> =20V, di <sub>G</sub> /dt = 1A/μs, t <sub>GP</sub> =50μs	125	2000	A/μs
dv/dt	Critical rate of rise of off-state voltage	V <sub>DR</sub> = 67%V <sub>DRM</sub>	125	1000	V/μs
T <sub>q</sub>	Circuit commutated turn off time	I <sub>TM</sub> =630A, -di <sub>F</sub> /dt = 10A/μs, V <sub>R</sub> = 100V, t <sub>p</sub> =1000μs Reapplied dv/dt = 50V/μs, V <sub>DR</sub> = 67%V <sub>DRM</sub>	125	30	μs
<b>GATE</b>					
I <sub>gt</sub>	Gate trigger current	V <sub>D</sub> =6V	25	300	mA
V <sub>gt</sub>	Gate trigger voltage	V <sub>D</sub> =6V	25	3.0	V
I <sub>H</sub>	Holding current	V <sub>D</sub> =6V, gate open circuit	25	1000	mA
I <sub>L</sub>	Latching current	V <sub>D</sub> =6V	25	1200	mA
<b>MOUNTING</b>					
R <sub>th(j-c)</sub>	Thermal impedance, sin 180°	Junction to case, Double side cooled		0.034	°C/W
R <sub>th(j-c)</sub>	Thermal impedance, rec120°	Junction to case, Double side cooled		0.039	°C/W
R <sub>th(c-h)</sub>	Thermal impedance	Case to heatsink, Double side cooled		0.006	°C/W
T <sub>j</sub>	Max. junction temperature			125	°C
T <sub>stg</sub>	Storage temperature			-40 .... 125	°C
M	Clamping Force			14 - 16	kN
W	Weight (Approx.)			300	gm
			Prepared by : ABA	Date of Publication : 25.03.2015	
			Approved by : RBS	Revision : 0	



DISSIPATION CHARACTERISTICS

ON STATE CURRENT DERATING CURVE

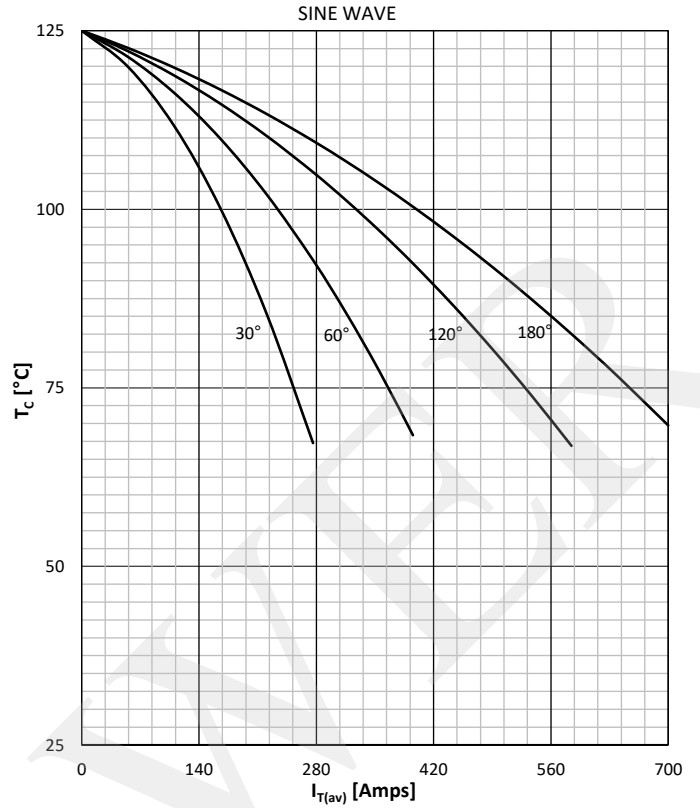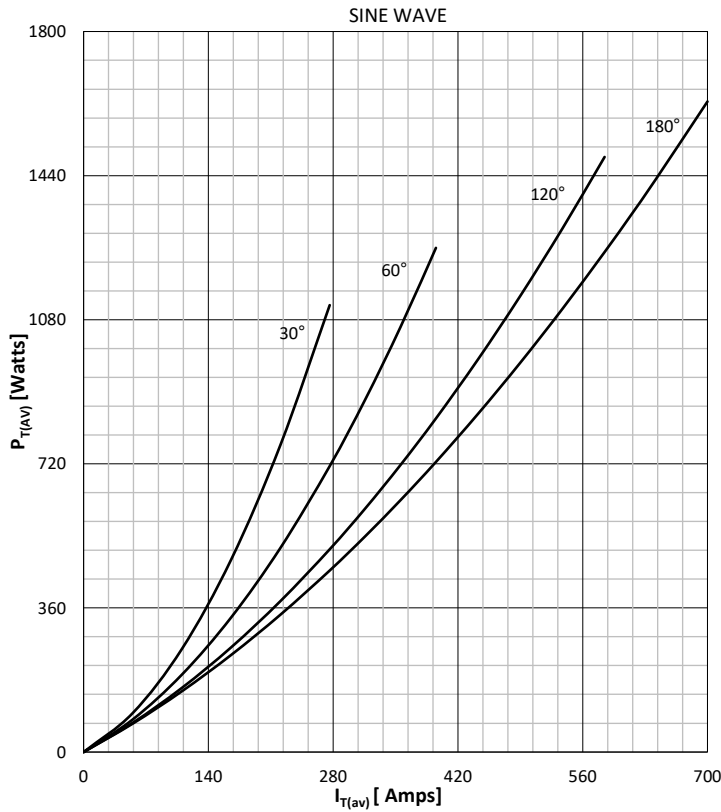


DISSIPATION CHARACTERISTICS

ON STATE CURRENT DERATING CURVE

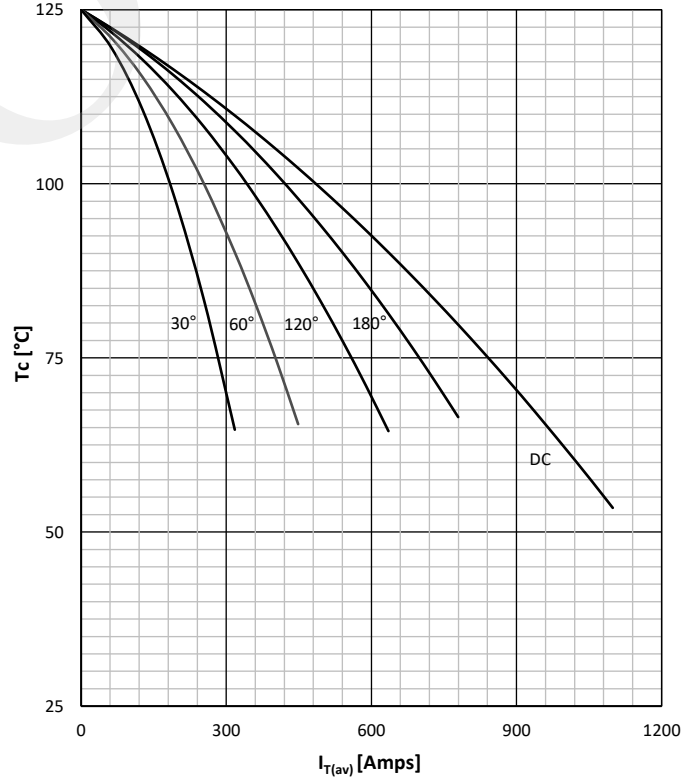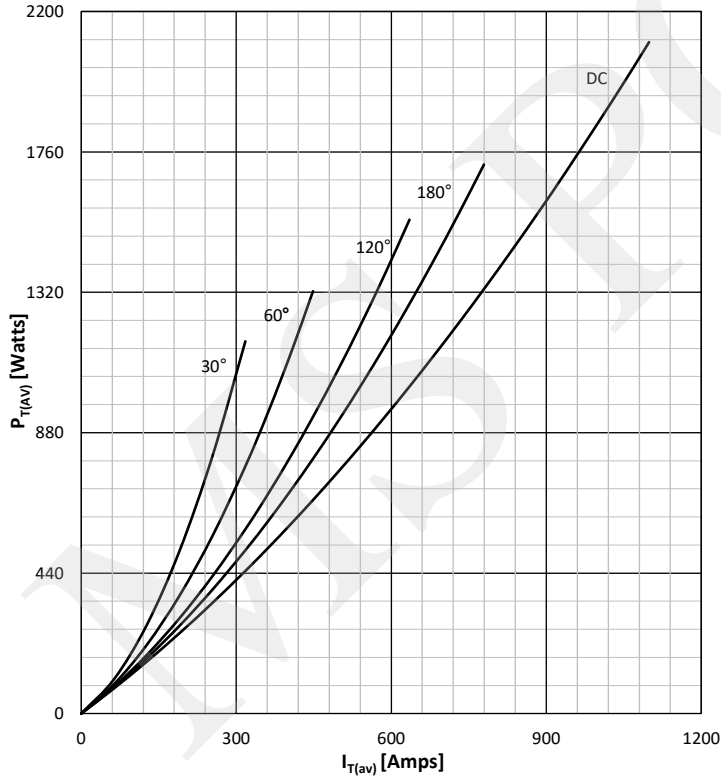


Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 0


ON -STATE CHARACTERISTIC

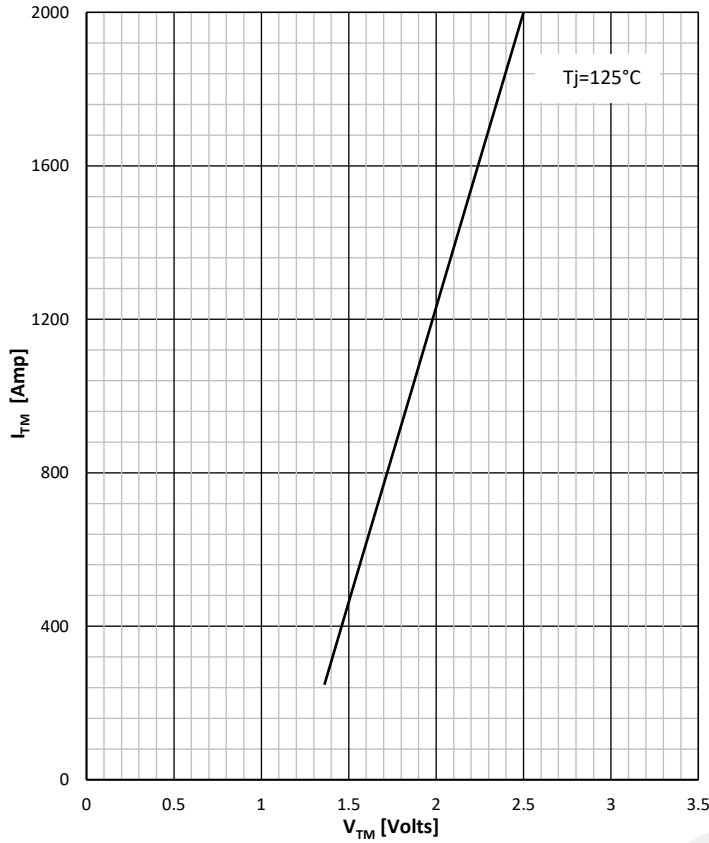


SURGE CHARACTERISTICS

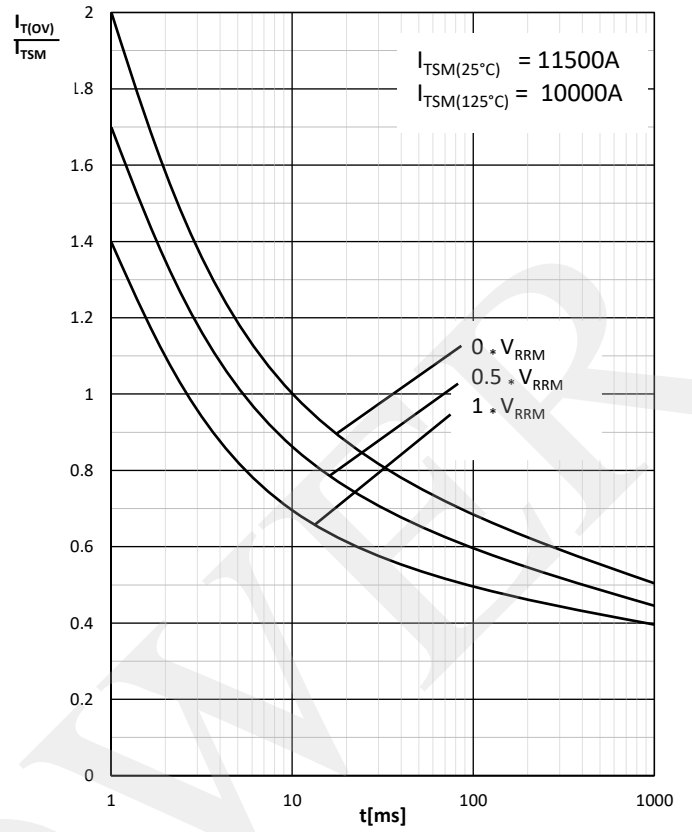

TRANSIENT THERMAL IMPEDANCE, PER ARM

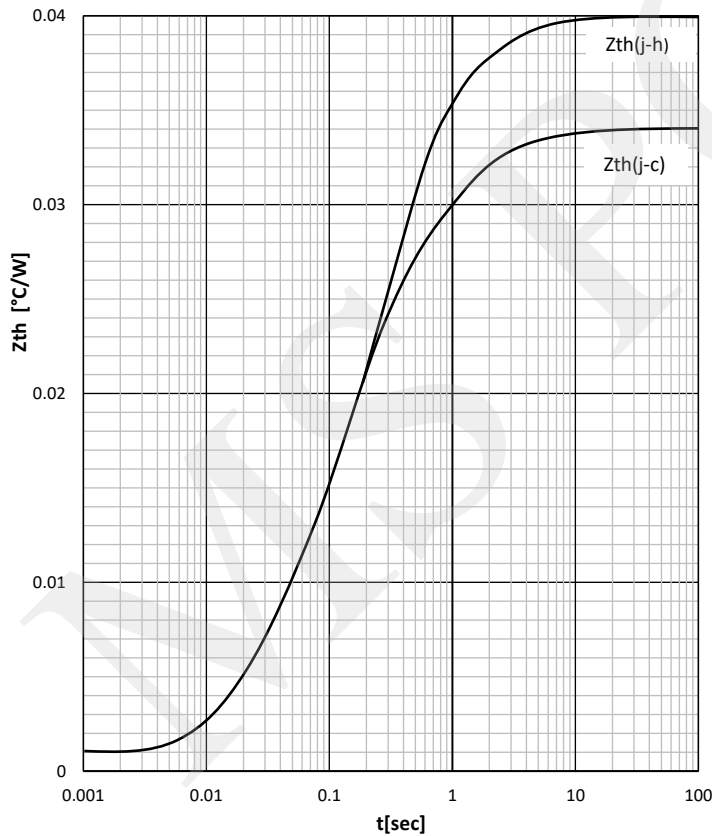

GATE TRIGGER CHARACTERISTICS

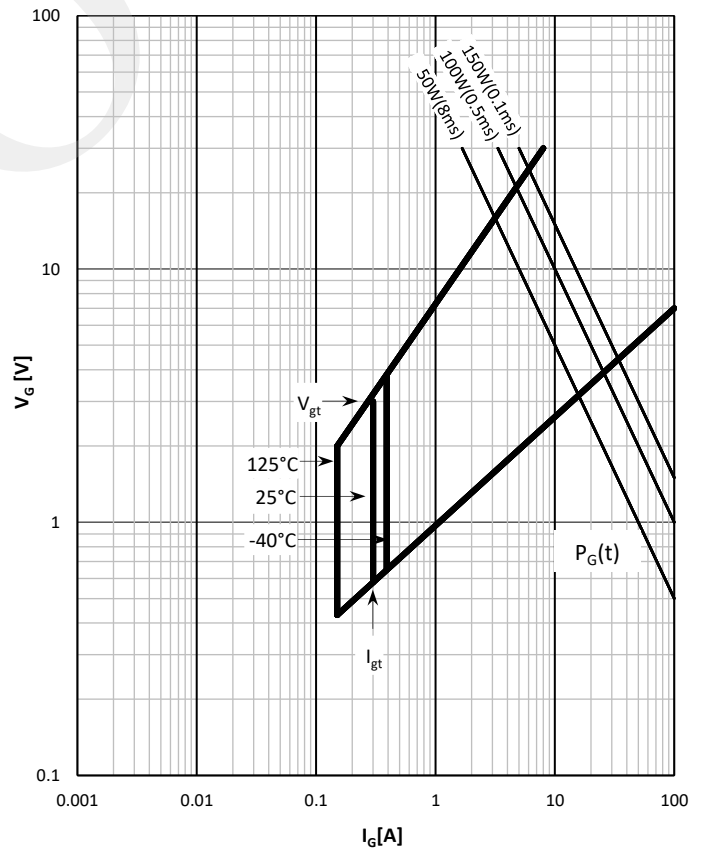


Prepared by : ABA

Date of Publication : 25.03.2015

Approved by : RBS

Revision : 0

Outline

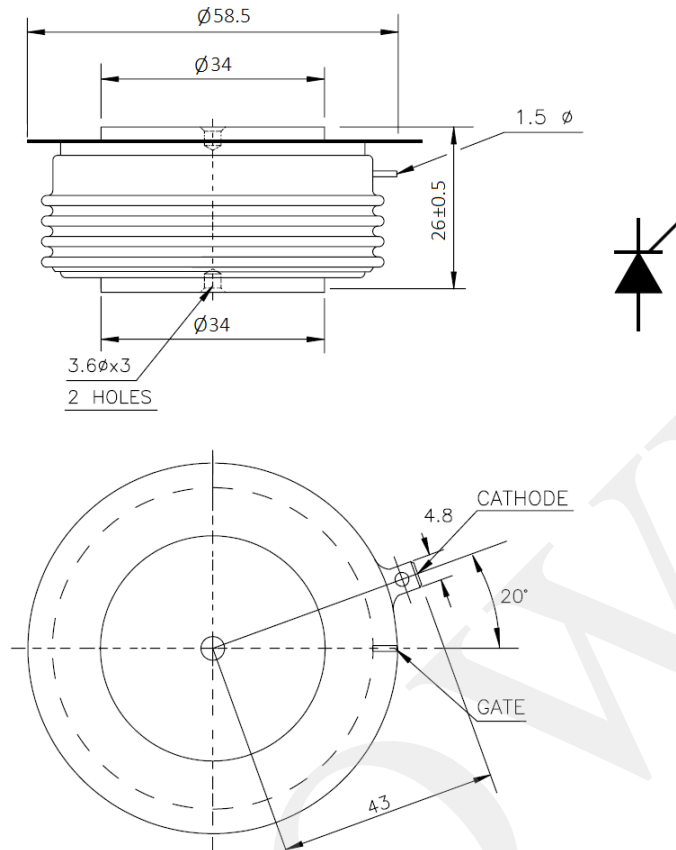

**MS Power GmbH**

Mergenthalerallee 79-81  
65760 Eschborn, Germany  
Web: [www.mspowergroup.com](http://www.mspowergroup.com)  
Mail: [info@mspowergroup.de](mailto:info@mspowergroup.de)

**Sales & Enquiry:**

[sales@mspowergroup.de](mailto:sales@mspowergroup.de)

**Technical Support:**

[solution@mspowergroup.de](mailto:solution@mspowergroup.de)

**After sales Service:**

[service@mspowergroup.de](mailto:service@mspowergroup.de)

Phone: +49 (0) 6196/7768 666

Fax: +49 (0) 6196/7757 888



Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 0

**Terms & Conditions of usage :**

The data contained in this product datasheet is exclusively Intended for technically trained staff. You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application. This product datasheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics. The information in the valid application-and assembly notes of the device must be considered.

Should you require product information in excess of the data given in this product datasheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see [www.mspowergroup.com](http://www.mspowergroup.com)). For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or live endangering or life support applications, please notify. Please note, that for any such applications we urgently recommend

- to perform joint Risk and Quality Assessments;
- the conclusion of Quality Agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery depended on the realization of any such measures.

If and to the extent necessary, please forward equivalent notices to your customers.

Changes of this product datasheet are reserved.

Prepared by : ABA	Date of Publication : 25.03.2015
Approved by : RBS	Revision : 0